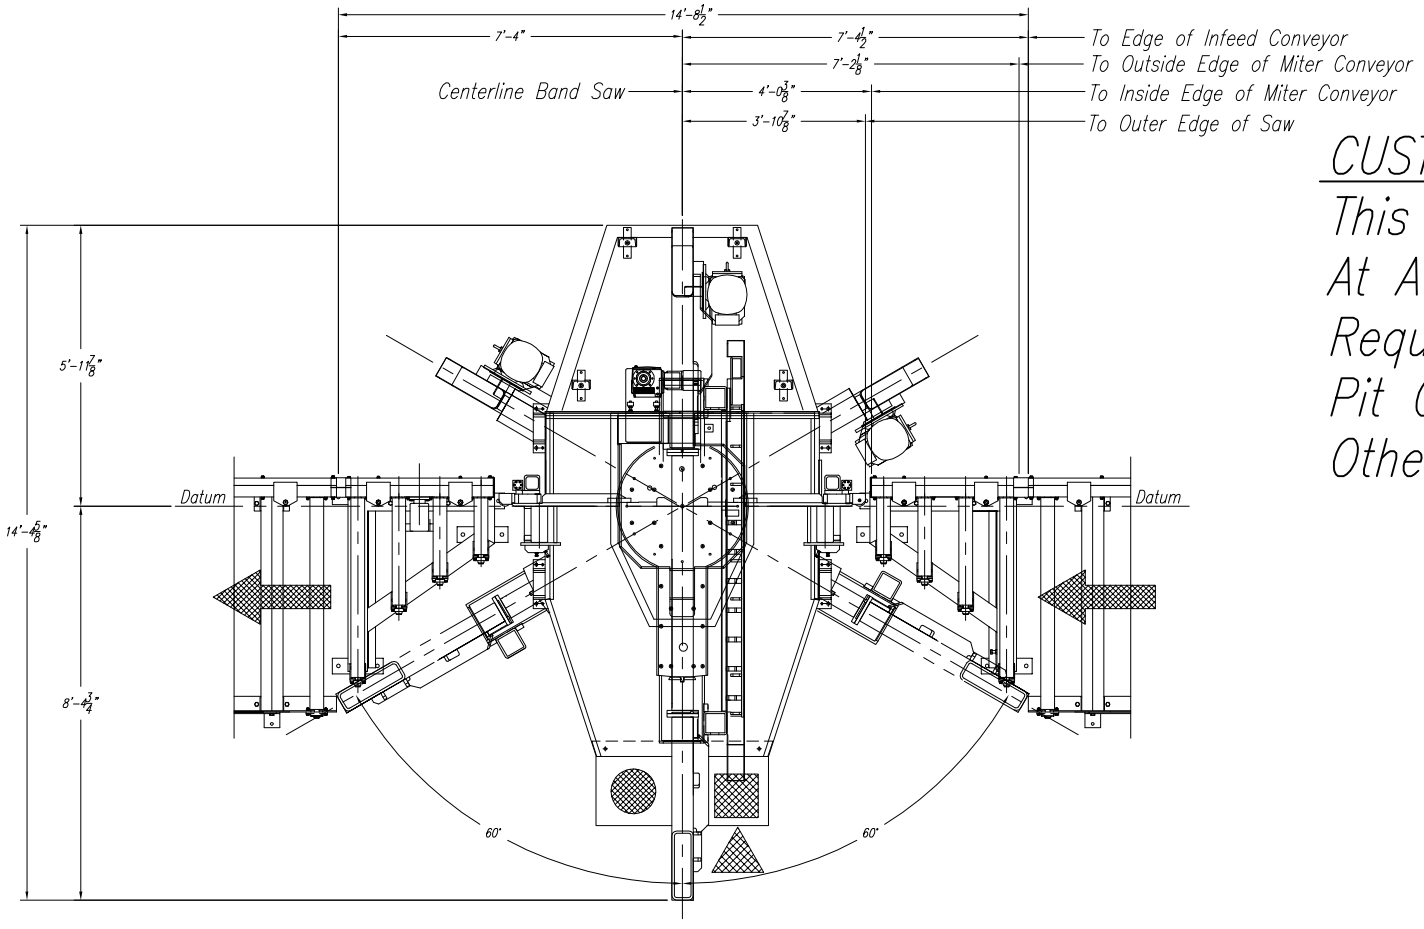

CUSTOMER NOTE!!!!

This Saw Is Manufactured At A 24.8" Passline And Requires A CUSTOMER SUPPLIED Pit Or Platform To Achieve Any Other Passline Requested.

Approximate Machine Weight

1100 DG – 12,324 lbs

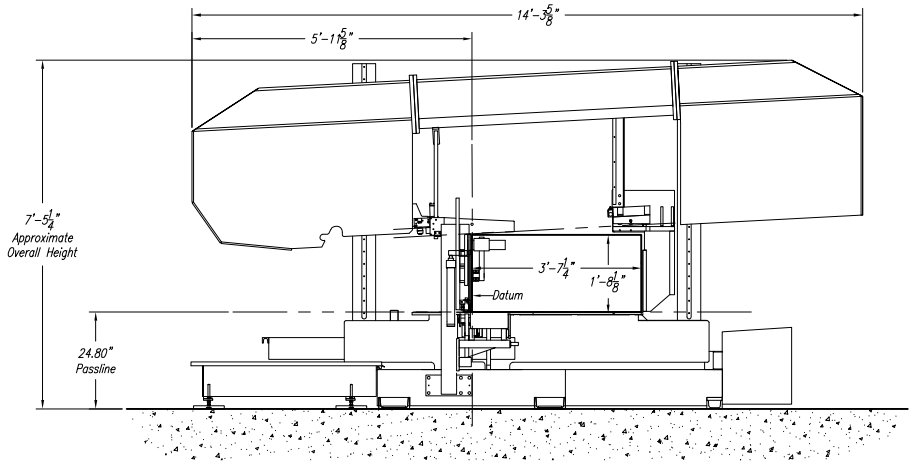

View A–A

SAW COOLANT RECOMMENDATION:

USE PEDDINGHAUS "PEDDI COOL" VEGETABLE BASE COOLANT
THIS PRODUCT IS FOR MIST COOLANT SYSTEMS
DO NOT MIX THIS COOLANT WITH WATER

!!!NOTE DO NOT DRILL HOLES FOR ANCHOR PLATES UNTIL MACHINE IS IN PLACE AND LEVEL AT FINAL INSTALLATION!!!

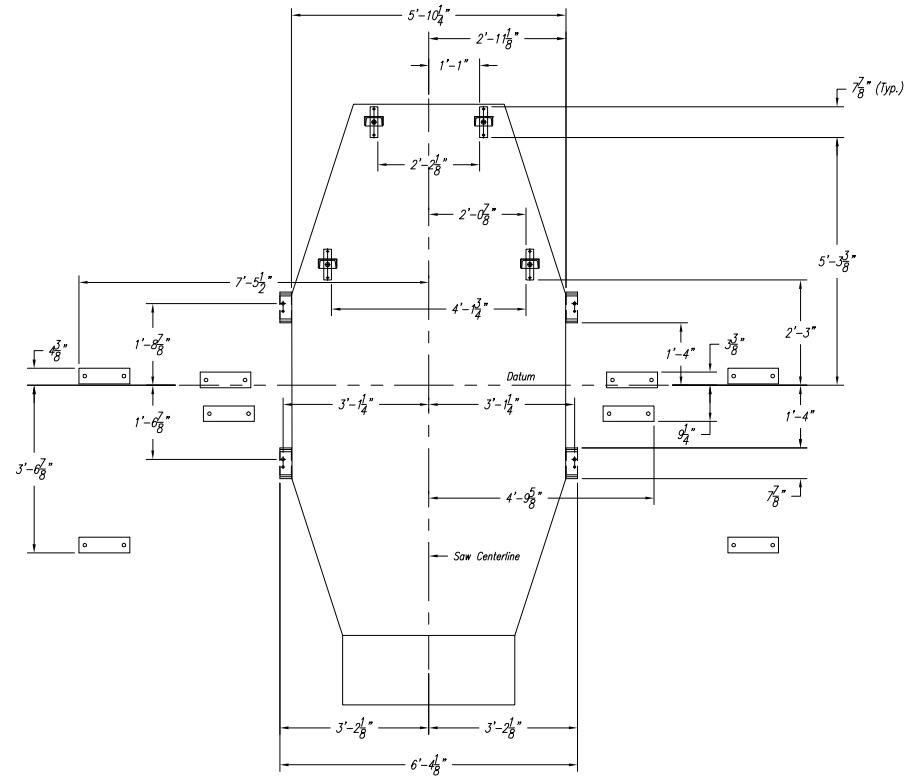

Saw Base

1100–510 Saw NOTES:

1.) Passline of Equipment Based on 24.8" from Floorline
2.) Concrete Under Equipment/Beams & Pits to be a Minimum of 6" Thick
3.) Primary 460 V., 3 Ph., 60 Hz. [Req'd @ each ■]
4.) Total K.V.A. for Equipment = 18 K.V.A. (22.5 Amps)
5.) Air Requirement: 90 PSIG, 2 SCFM Min. Free Air [Req'd @ each ▲]
6.) Hydraulic Oil (Mobil DTE #24 Or Equal) [Req'd @ Each ●] {3.5 Gal. Total}
7.) Anchor Bolts (Control Stand) 1/2" ITW Red Head WS-1270 Or Equal [7 Req'd]
8.) Anchor Bolts (Mitered Conveyors) 5/8" ITW Red Head WS-5870 Or Equal [16 Req'd]
9.) Anchor Bolts (Machine & Safety Stands) 3/4" ITW Red Head WS-3470 Or Equal [24 Req'd]

E				Peddinghaus Corp. BRADLEY, ILL. U.S.A.	IMPORTANT Safety Note! Because of the difficulty to effectively guard the full length of the system it is the customers responsibility to prevent access by unauthorized personnel and to provide safe crossing.
D					
C				1100–510 DG Miter Band Saw For	DRAWN BY: B. Martin / SCALE: 1/2" = 1' / DATE:
B					DRWG. NO.
A					
LET.	REVISION/C.N.#	BY	DATE	THIS PRINT IS THE PROPERTY OF PEDDINGHAUS CORP. AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF SAID COMPANY.	