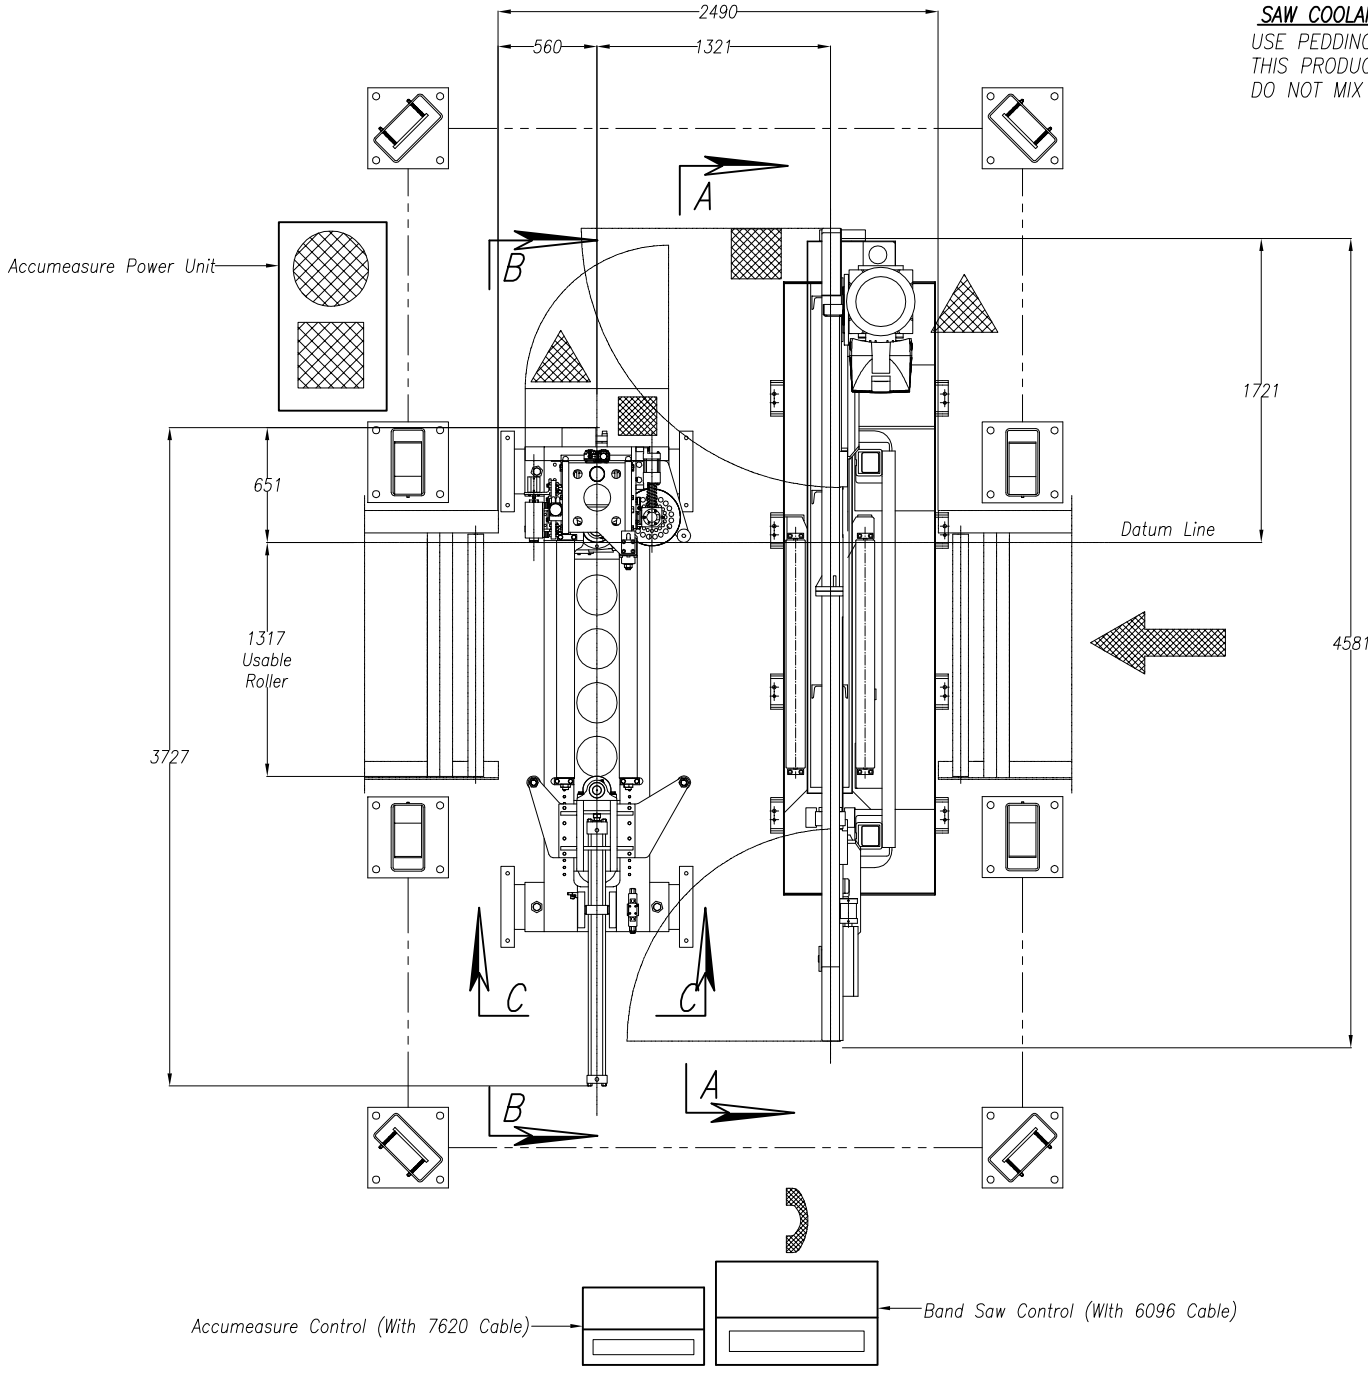

SAW COOLANT RECOMMENDATION:

USE PEDDINGHAUS "PEDDI COOL" VEGETABLE BASE COOLANT
THIS PRODUCT IS FOR MIST COOLANT SYSTEMS
DO NOT MIX THIS COOLANT WITH WATER

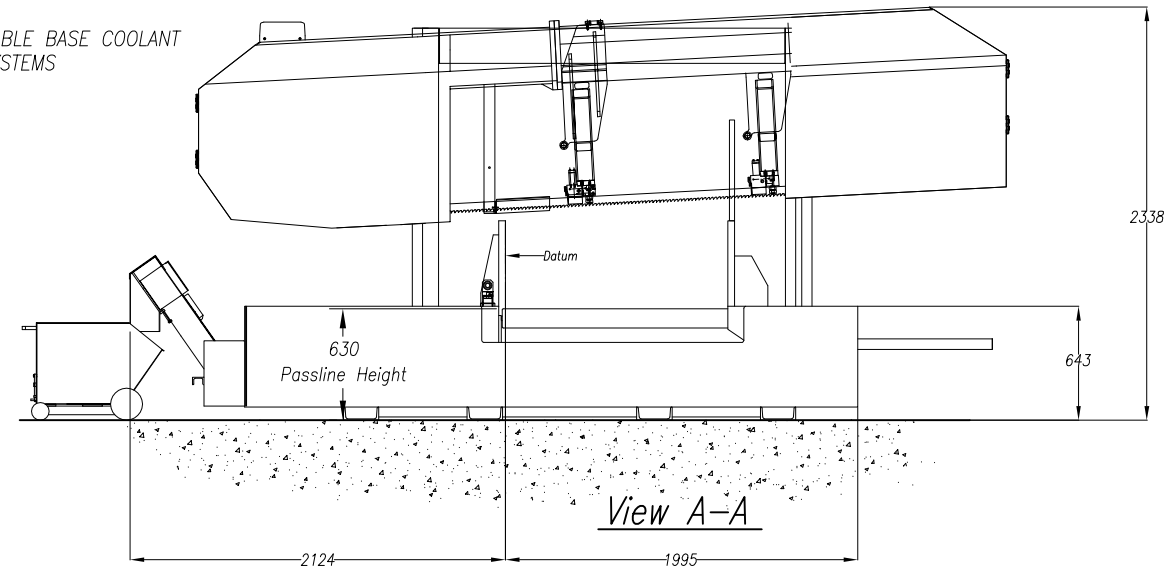

View A–A

Approximate Machine Weight

1250–510 – 5,037kg
Accumeasure – 2,948kg

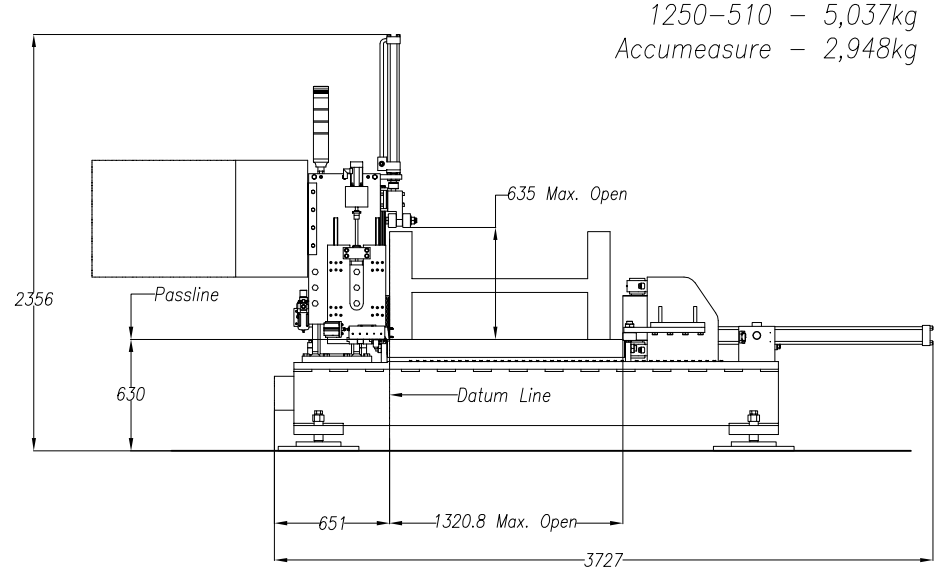

View B–B

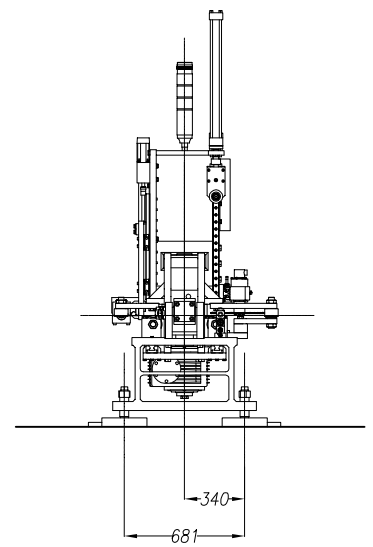

View C–C

CUSTOMER NOTE!!!!
This Saw Is Manufactured
At A 630mm Passline And
Require A CUSTOMER SUPPLIED
Pit Or Platform To Achieve Any
Other Passline Requested.

NOTES:

1.) Passline of Equipment Based on 630mm from Floorline
2.) Concrete Under Equipment/Beams & Pits to be a Minimum of 200mm Thick
3.) Primary 380 V., 3 Ph., 50 Hz. [Req'd @ each ■]
4.) Total kw for Equipment = 44 kw
5.) Air Requirement: 6 bar, 3.4 SCMH Min. Free Air [Req'd @ Saw ▲]
6.) Hydraulic Oil (Mobil DTE #24 Or Equal) [Req'd @ Each ●] {113 L Total}
7.) Anchor Bolts For 1250 Saw: 12mm ITW Red Head WS-1270 Or Equal [8 Req'd]
8.) Anchor Bolts For Safety Stands 20mm ITW Red Head WS-3470 or Equal [16 Req'd]
9.) Saw Coolant: Peddi Cool {1 Gal. Req'd}

E				Peddinghaus Corp. BRADLEY, ILL. U.S.A.	IMPORTANT Safety Note! Because of the difficulty to effectively guard the full length of the system it is the customers responsibility to prevent access by unauthorized personnel and to provide safe crossing.
D					
C				Accumeasure & 1250 Band Saw 90° for	DRAWN BY: B. Martin / SCALE: 1 : 20 / DATE:
B					DRWG. NO.
A					
LET.	REVISION/C.N.#	BY	DATE	THIS PRINT IS THE PROPERTY OF PEDDINGHAUS CORP. AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF SAID COMPANY	