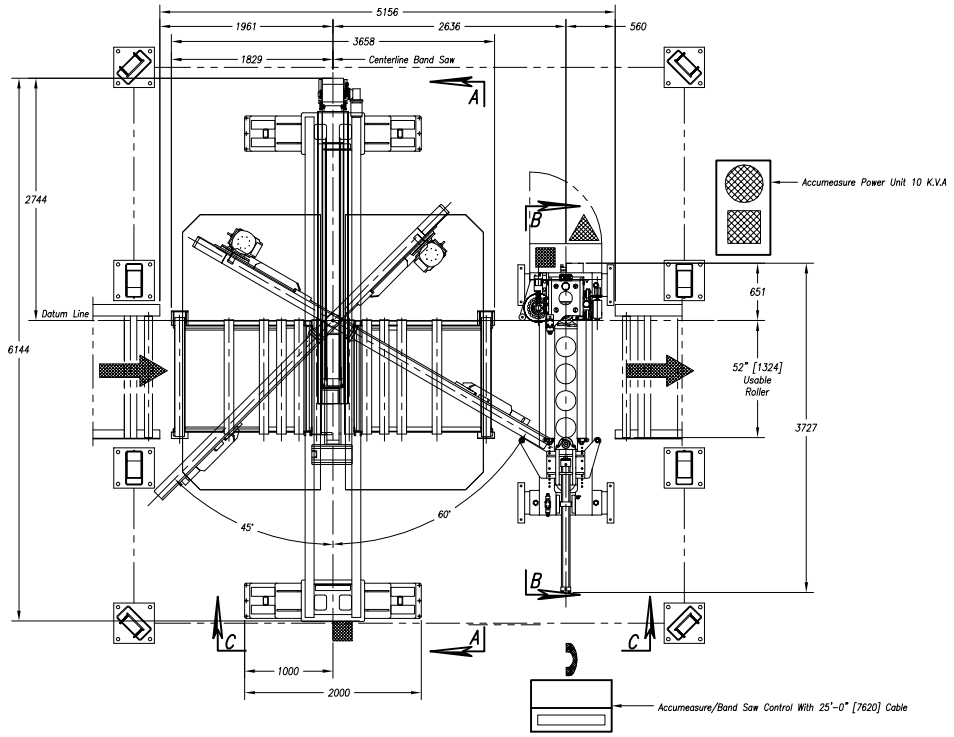

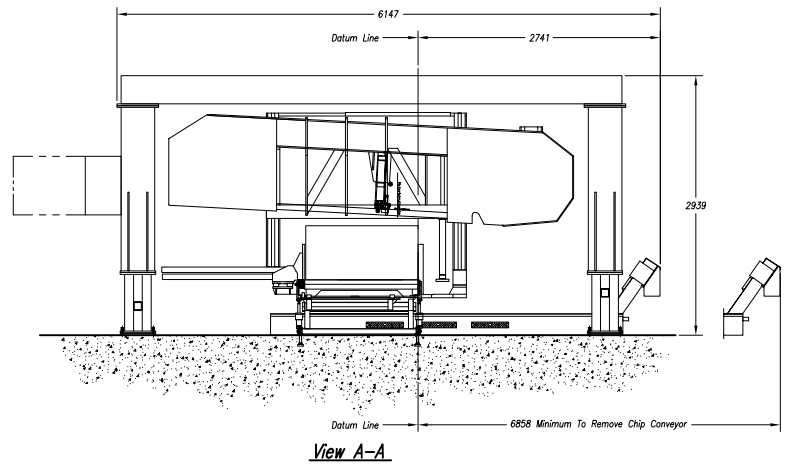

View A-A

CUSTOMER NOTE!!!!
This Saw Is Manufactured At A 630mm Passline And Require A CUSTOMER SUPPLIED Pit Or Platform To Achieve Any Other Passline Requested.

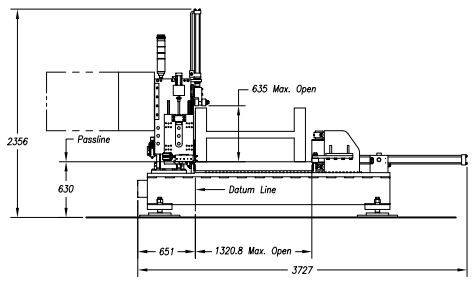

View B-B

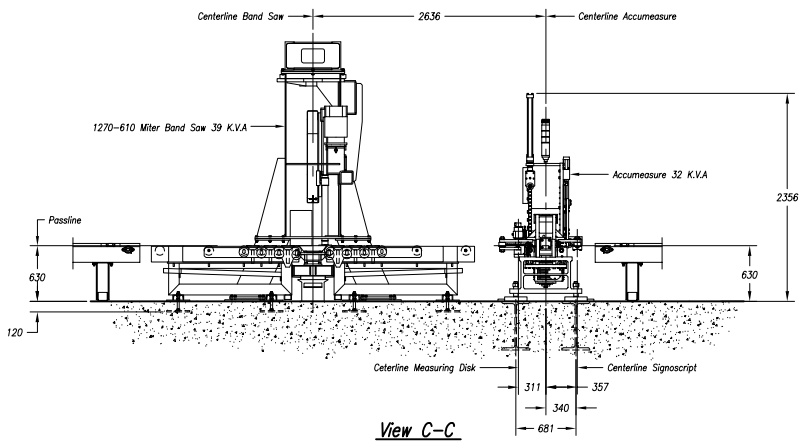

View C-C

NOTES

1.) Passline of Equipment Based on 630 mm from Floorline
2.) Concrete Under Equipment/Beams & Pits to be a Minimum of 152mm Thick
3.) Primary 400 V., 3 Ph., 50 Hz. [Req'd @ each ■]
4.) Total kW for Equipment = 56.8 kW
5.) Air Requirement: 6.21 bar, 1.19 SCMM Min. Free Air [Req'd @ each ▲]
6.) Hydraulic Oil (Mobil DTE #24 Or Equal) [Req'd @ Each ●] {227 L Total}
7.) Anchor Bolts For Accumeasure/Band Saw: 13mm Phillips Red Head #S-12 Or Equal [48 Req'd]
8.) Analog Phone Line for Remote Diagnostic And Support. [Req'd @ Each)]

SAW COOLANT RECOMMENDATION:
USE PEDDINGHAUS "PEDDI COOL" VEGETABLE BASE COOLANT
THIS PRODUCT IS FOR MIST COOLANT SYSTEMS
DO NOT MIX THIS COOLANT WITH WATER

LET.	REVISION/C.N.#	BY	DATE
E			
D			
C			
B			
A			

THIS PRINT IS THE PROPERTY OF PEDDINGHAUS CORP. AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF SAID COMPANY

Peddinghaus Corp.
BRADLEY, ILL. U.S.A.
Accumeasure & 1270-610 Miter Band Saw for

IMPORTANT Safety Note!
Because of the difficulty to effectively guard the full length of the system it is the customers responsibility to prevent access by unauthorized personnel and to provide safe crossing.

DRAWN BY: B. Martin | SCALE: 1:40 | DATE:
DRWG. NO.
Sheet of