

Peddinghaus

PeddiCat

55 TON IRONWORKER






ELECTRIC LENGTH STOP



CORNER RADIUS TOOL

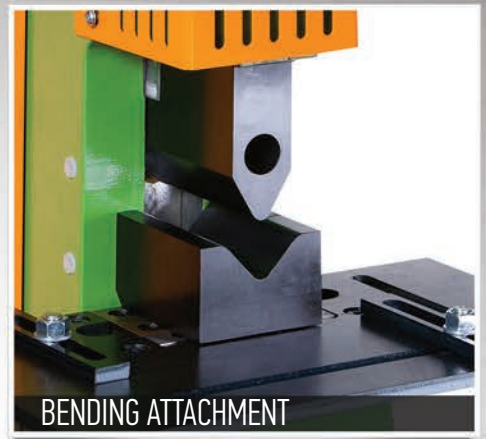

BENDING ATTACHMENT

Flat Bar Shear



Section Shear



Bar Stock Shear



Punch Unit



Notch Unit



Bending Attachment



Machine Data

Power Rating	4 kW
Charge of Oil	45 liters
Net Weight with Oil	820 kg
Machine Dimensions	100 × 68 × 168 cm

Flat Bar Shear

Flat Bar Max	350 × 13 mm
Angle Iron, 45° Cut	100 × 8 mm
Blade Cut Length	370 mm
Working Height	770 mm

Section/Stock Shear

Cross Section	1550 mm ²
Adjustable Stroke	10 - 36 mm
Working Height	1059 mm
with Standard Blades:	
Angle Iron, 90° Cut	100 × 8 mm
Rounds	32 + 17 mm
Squares	30 + 18 mm

Notch Unit

Bending Attachment	10 × 100 mm
Working Height	1035 mm
with Square Notching Attachment:	
Flat Bar	10 mm
Angle	55 × 10 mm
Channels in Flange	80 - 120 mm
I-beams in Flange	80 - 120 mm
Width × Depth	44 × 50 mm

Punch Unit

Adjustable Stroke	10 - 36 mm
Number of Punch Strokes	21 min ⁻¹
Throat Depth	203 mm
Working Height	1035 mm
with Standard Punching Attachment:	
	31 mm Ø in 12 mm
with Oversized Punching Attachment:	
Oversize 58	58 mm Ø in 7 mm
Oversize 65	65 mm Ø in 6 mm

Peddinghaus

www.peddinghaus.com

Peddinghaus USA • (815) 937-3800 | Peddinghaus UK • +44 1952 200 377 | Peddinghaus Germany • +49 (0) 2332 72-0
 Peddinghaus Latin America • +52 81-1001-7087 | Peddinghaus Española • +34 945 465370

PED090519